



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____


Con-Stab® Male Adapters

Design Features:


- Continental's patented "ID Seal"
- For underground PE pipe (ASTM D 2513) only
- Yellow Medium Density Polyethylene - PE2406
- Zinc Dichromate Plated Steel
- Made in USA

Operating Specifications:

Temperature: -20° to 140° F
 Pressure: 125 psi

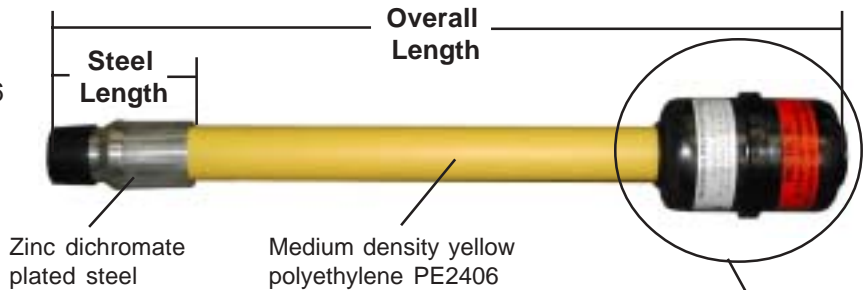

Continental's "ID Seal"

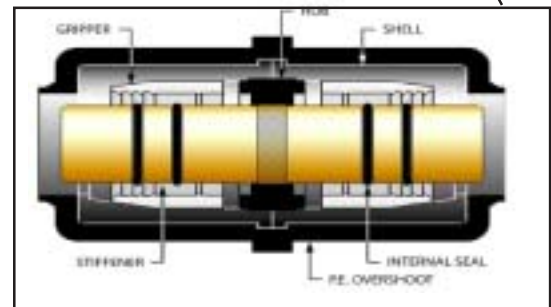

Always Match Pipe Size & SDR

You must use a Continental Chamfer Tool on a Continental Fitting



IMPORTANT
 CHAMFER THE ID OF PIPE



Continental Industries is an ISO 9001 Certified Company.
 NFPA 58, LP-Gas Code NFPA 54, National Fuel Gas Code
 ICC – International Plumbing Code IAPMO – Uniform Plumbing Code
 Approved by the Commonwealth of Massachusetts
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
 ASTM D 2513 "Standard Specification for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"



WR#	Size	Wall Thickness	Steel Length	Overall Length	Weight (lbs.)	Required Chamfer Tool
2885000	1/2" CTS	.090 Wall	5"	19-1/8"	.71	2888020
2885002	3/4" IPS	SDR-11	5"	19-1/4"	1.5	2888014
2885004	1" IPS	SDR-11	5"	19-1/4"	2.0	2888016
2885020	1" CTS	.099/.101 Wall	5"	19-1/4"		2888022
2885006	1-1/4" IPS	SDR-10	5-1/2"	21-13/16"	3.0	2888006
2885007	1-1/4" IPS	SDR-11	5-1/2"	21-13/16"	3.1	2888007
2885008	1-1/2" IPS	SDR-11	5-3/4"	22-5/8"	3.8	2888008
2885010	2" IPS	SDR-11	5-3/4"	22-5/8"	4.5	2888010