



Job Name: \_\_\_\_\_

Job Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Approval: \_\_\_\_\_


## Poly-End Male Adapters

### Design Features:

- For underground PE pipe (ASTM D 2513) only
- Yellow Medium Density Polyethylene - PE2406
- Corrosion Resistant Epoxy Coating
- Made in USA

### Operating Specifications:

Temperature: -20° to 140° F  
 Pressure: 100 psi

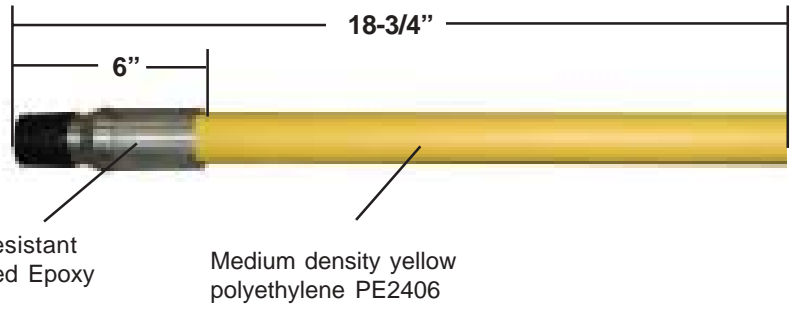

Always Match Pipe Size & SDR

You must use a **Continental Chamfer Tool** on a **Continental Fitting**



NFPA 58, LP-Gas Code      NFPA 54, National Fuel Gas Code  
 ICC – International Plumbing Code      IAPMO – Uniform Plumbing Code  
 Approved by the Commonwealth of Massachusetts  
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)  
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"  
 ASTM D 2513 "Standard Specification for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"



WR#	Size	Wall Thickness	Steel Length	Overall Length	Weight (lbs.)	Required Chamfer Tool
2885050	3/4" IPS	SDR-11	6"	18-3/4"	.843	2888014
2885052	1" IPS	SDR-11	6"	18-3/4"	1.18	2888016
2885070	1" CTS	.099/.101 Wall	6"	18-3/4"	1.05	2888022
2885054	1-1/4" IPS	<b>SDR-10</b>	6"	18-3/4"	1.70	2888006
2885055	1-1/4" IPS	SDR-11	6"	18-3/4"	1.73	2888007
2885056	1-1/2" IPS	SDR-11	6"	18-3/4"	2.72	2888008
2885058	2" IPS	SDR-11	6"	18-3/4"	4.24	2888010