



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____



3" Poly-End Anodeless Gas Meter Riser

Design Features:

- Anodeless design
- For underground PE pipe (ASTM D 2513) only
- Corrosion-Resistant fusion-bonded epoxy coating
- Yellow Medium Density polyethylene - PE2406
- Plain PE end for use with fusion or Dresser® style 711 coupling
- Made in USA

Operating Specifications:

Temperature: -20 to 140° F
Pressure: 100 psi

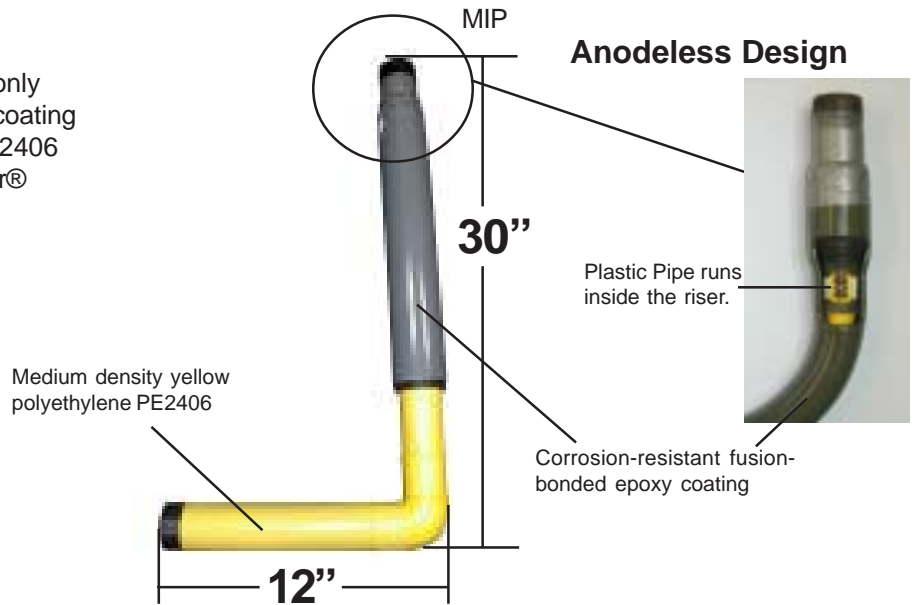

Always Match Pipe Size & SDR

You must use a **Continental Chamfer Tool** on a **Continental Fitting**



NFPA 58, LP-Gas Code NFPA 54, National Fuel Gas Code
 ICC – International Plumbing Code IAPMO – Uniform Plumbing Code
 Approved by the Commonwealth of Massachusetts
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
 ASTM D 2513 "Standard Specification for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"



WR#	Size	Wall Thickness	Dimentions		Weight (lbs.)
			V	H	
2886070	3" IPS	SDR-11.5	30"	12"	20.75