



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____

Poly-End Anodeless Gas Meter Risers


Design Features:

- Anodeless design
- For underground PE pipe (ASTM D 2513) only
- Corrosion-Resistant fusion-bonded epoxy coating
- Yellow Medium Density polyethylene - PE2406
- Plain PE end can be used with compression fittings, "stab" fittings, & fusion.
- Made in USA

Operating Specifications:

Temperature: -20 to 140° F

Pressure: 100 psi

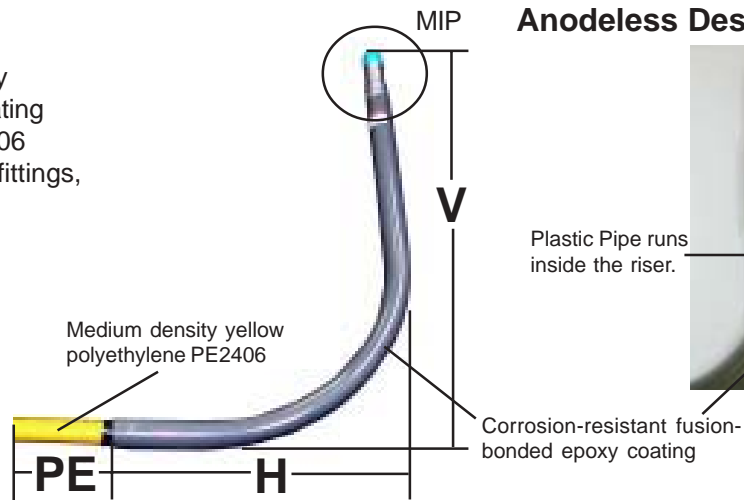

Anodeless Design



Plastic Pipe runs inside the riser.



Always Match Pipe Size & SDR

You must use a **Continental Chamfer Tool** on a **Continental Fitting**



NFPA 58, LP-Gas Code
 ICC – International Plumbing Code
 Approved by the Commonwealth of Massachusetts
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
 ASTM D 2513 "Standard Specification for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"



| WR# | Size | Wall Thickness | Dimensions | | | Weight (lbs.) | Required Chamfer Tool |
|---------|------------|----------------|------------|-----|-----|---------------|-----------------------|
| | | | V | H | PE | | |
| 2886002 | 3/4" IPS | SDR-11 | 30" | 16" | 10" | 4.50 | 2888014 |
| 2886006 | 1" IPS | SDR-11 | 30" | 16" | 10" | 5.95 | 2888016 |
| 2886030 | 1" CTS | .099/.101 Wall | 30" | 16" | 10" | 8.20 | 2888022 |
| 2886010 | 1-1/4" IPS | SDR-10 | 36" | 22" | 10" | 8.90 | 2888006 |
| 2886011 | 1-1/4" IPS | SDR-11 | 36" | 22" | 10" | 8.85 | 2888007 |
| 2886014 | 1-1/2" IPS | SDR-11 | 36" | 26" | 10" | 14.20 | 2888008 |
| 2886018 | 2" IPS | SDR-11 | 36" | 30" | 10" | 21.25 | 2888010 |