



Job Name: \_\_\_\_\_

Job Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Approval: \_\_\_\_\_

# Con-Stab® Anodeless Gas Meter Risers


## Design Features:

- Anodeless design
- For underground PE pipe (ASTM D 2513) only
- Continental's patented "ID Seal"
- Corrosion-Resistant fusion-bonded epoxy coating
- Yellow Medium Density polyethylene - PE2406
- Made in the USA

## Operating Specifications:

Temperature: -20° to 140° F

Pressure: 125 psi

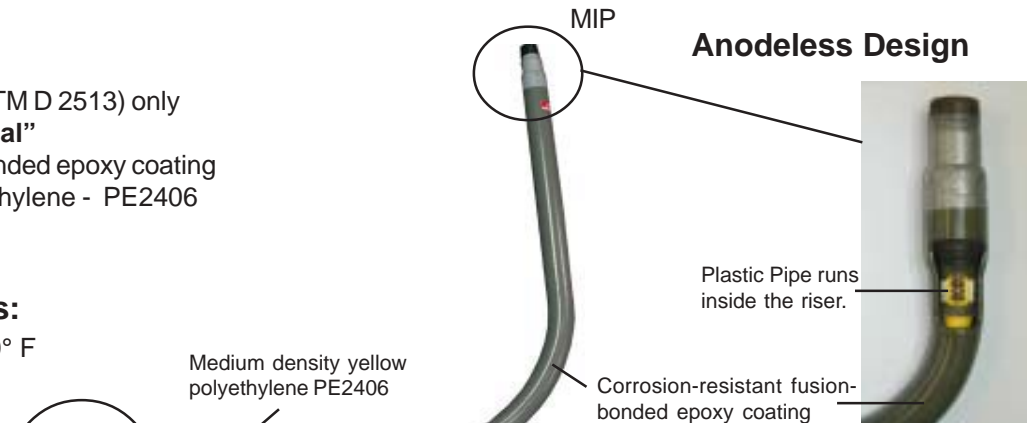


Always Match Pipe Size & SDR

You must use a Continental Chamfer Tool on a Continental Fitting



## Continental's "ID Seal"

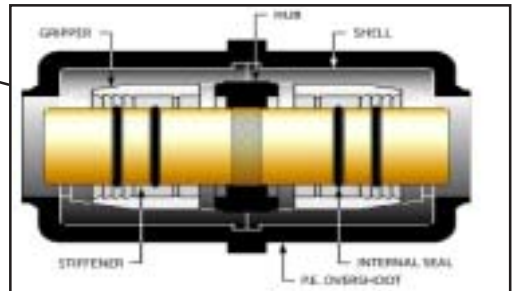

Continental Industries is an ISO 9001 Certified Company.  
 NFPA 58, LP-Gas Code                      NFPA 54, National Fuel Gas Code  
 ICC – International Plumbing Code      IAPMO – Uniform Plumbing Code  
 Approved by the Commonwealth of Massachusetts  
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)  
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"  
 ASTM D 2513 "Standard Specification for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"

WR#	Size	Wall Thickness	Vertical Length	Horizontal Length	Weight (lbs.)	Required Chamfer Tool
2886036	1/2" CTS	.090 Wall	30"	12"	3	2888020
2886004	3/4" IPS	SDR-11	30"	29"	5	2888014
2886008	1" IPS	SDR-11	30"	28"	6	2888016
2886040	1" CTS	.099/.101 Wall	30"	27"	6	2888022
2886012	1-1/4" IPS	SDR-10	32"	34"	10	2888006
2886013	1-1/4" IPS	SDR-11	32"	34"	10	2888007
2886016	1-1/2" IPS	SDR-11	32"	34"	16	2888008
2886020	2" IPS	SDR-11	36"	34"	22	2888010