



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____

Gas Range Connector Adapter


Design Features:

- Flare: 5/8" OD (15/16 - 16T)
- Domestic

Operating Specifications:

Temperature: -40° to 150° F
Pressure: Standard Line Pressures up to 1/2 psi Max

Use: For use with with natural, manufactured, mixed and liquefied petroleum gasses and LP gas-air mixtures.

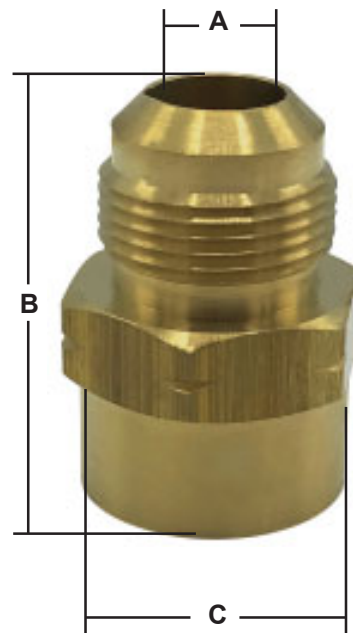

Material Specifications	
Part	Material
Adapter Body	Brass - C36000



CSA listed to ANSI Z21.24 / CSA 6.10 Connectors
 CSA listed to ANSI Z21.75 / CSA 6.27 Connectors

W-R#	Size	Dimensions			Weight	Box
		A	B	C		
0814102	5/8" Flare x 1/2" FIP	.5"	2.06"	1-1/16"	.142 lbs.	25
0814104	5/8" Flare x 3/4" FIP	.5"	2.00"	15/16"	.203 lbs.	25
0814106	5/8" Flare x 1/2" MIP	.5"	1.78"	1-1/8"	.192 lbs.	25
0814108	5/8" Flare x 3/4" MIP	.5"	1.66"	15/16"	.188 lbs.	25