

Job Name:	
Job Location:	
Contractor:	
Engineer:	
Approval:	

## Marshalltown Square Face Tridicator

## **Design Features:**


· Accuracy: 3% of Span

Domestic

**Use:** For use with hot water heating systems and hot water boilers.

## Sensing Element Temperature Pressure Bimetallic coil Bourdon tube

Material Specifications									
No.	Part	Material							
1	Face/Lens	Glass							
2	Case	Black Steel							
	Socket	Brass							
	Movement	Brass							

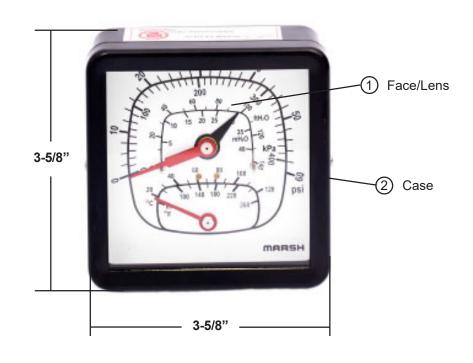

W-R#	Dial Size	NPT	Outlet	Pressure Range	Pressure Increments	Temp. Range	Temp. Increments	Stem Length	Weight
1711010	3-1/4"	1/2"	Angle	0 to 60 psi*	2 lb.	60° to 260°F**	20°F	3-1/8"	1.065 lbs.
1711012	3-1/4"	1/2'	Straight	0 to 60 psi*	2 lb.	60° to 260°F**	20°F	3-7/8"	1.080 lbs.

<sup>\*</sup> also in kPA & ft H<sub>2</sub>O \*\*also in °C

**Warning:** Misuse of this product may cause explosion and personal injury. Read ANSI-B40.1 and apparatus installation/operating instructions prior to use. DO NOT USE ON OXYGEN SERVICE.