

**SAMMYS**<sup>®</sup>

Ask for SAMMYS in the YELLOW Box!



Job Name: \_\_\_\_\_

Job Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Approval: \_\_\_\_\_

## “Sammys” Screws<sup>®</sup> for Wood - Straight

### Design Features:

- Steel Construction
- Electro-Zinc Finish
- Domestic


### Operating Specifications:

UL Minimum wood thickness: 1-1/2”  
 Rod Size: 3/8” x 16T

### Recommended Installation Tool:

Sammys<sup>®</sup> Nut Driver (Black)  
 W-R # 2440102

**Use:** For use with a 3/8” threaded rod. Screw installs vertically onto the bottom of wood structures easily and quickly reducing installation time and material costs.

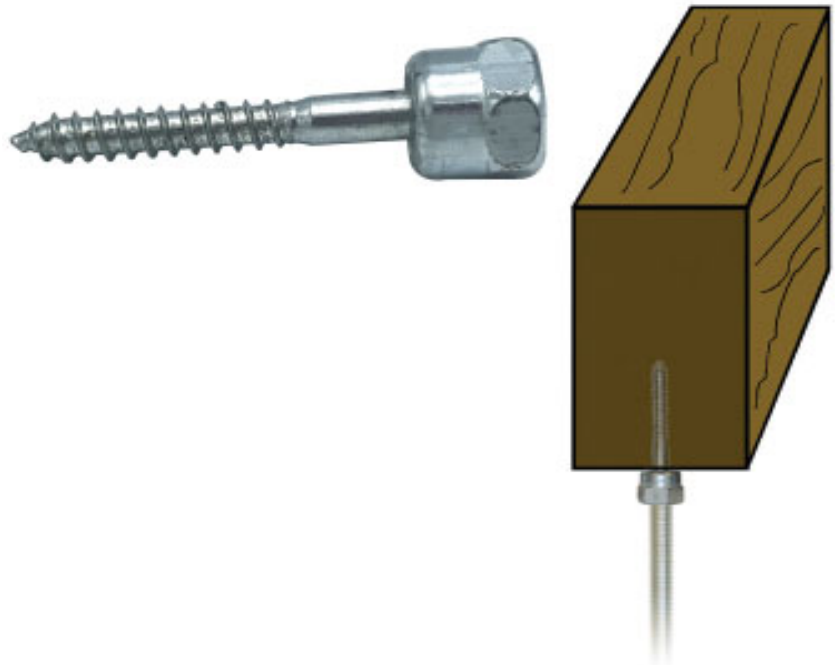

W-R#	Model	Screw Size	Ultimate Pull Out (lbs.)	UL Test Load (lbs.)	FM Test Load (lbs.)	Weight
2440001	GST 10	1/4" x 1"	210 (7/16" OSB) 670 (3/4" PLY)	300		.0470 lbs.
2440002	GST 20	1/4" x 2"	1760 (Fir)	850	1475	.0595 lbs.
2440015	GST 30	1/4" x 3"	2060 (Fir)	1500	1475	.0700 lbs.