

SAMMYS[®]

Ask for SAMMYS in the YELLOW Box!



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____

“Sammys” Screws[®] for Wood - Sidewinder

Design Features:


- Steel Construction
- Electro-Zinc Finish
- Domestic

Operating Specifications:

UL Minimum wood thickness: 1-1/2”
 Rod Size: 3/8” x 16T

Recommended Installation Tool:

Sammys[®] SW Nut Driver (Red)
 W-R # 2440104

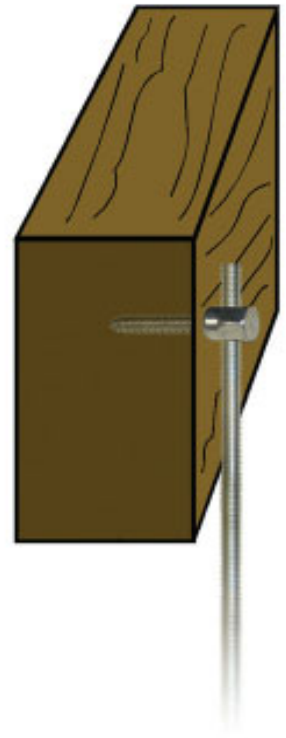

Use: For use with a 3/8” threaded rod. Screw installs horizontally into the side of wood structures easily and quickly reducing installation time and material costs.



W-R#	Model	Screw Size	Ultimate Pull Out (lbs.)	UL Test Load (lbs.)	Weight
2440003	SWG-10	1/4” x 1”	622 (Fir)	300	.0580 lbs.
2440004	SWG-25-380	1/4” x 2-1/2”	1725 (Fir)	1500	.0985 lbs.
2440016	SWG-30	1/4” x 3”	2060 (Fir)	1500	.0805 lbs.