

SAMMYS[®]

Ask for SAMMYS in the YELLOW Box!



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____

“Sammys” Screws[®] for Steel - Straight

Design Features:

- Steel Construction
- Electro-Zinc Finish
- Head: 5/8" AF End-Drilled
- Made with TEKS
- Domestic


Operating Specifications:

Rod Size: 3/8" x 16T

Recommended Installation Tool:

Sammys[®] Nut Driver
(Black) W-R # 2440102

Use: For use with a 3/8" threaded rod.
Screw installs vertically onto the bottom of steel structures easily and quickly reducing installation time and material costs.

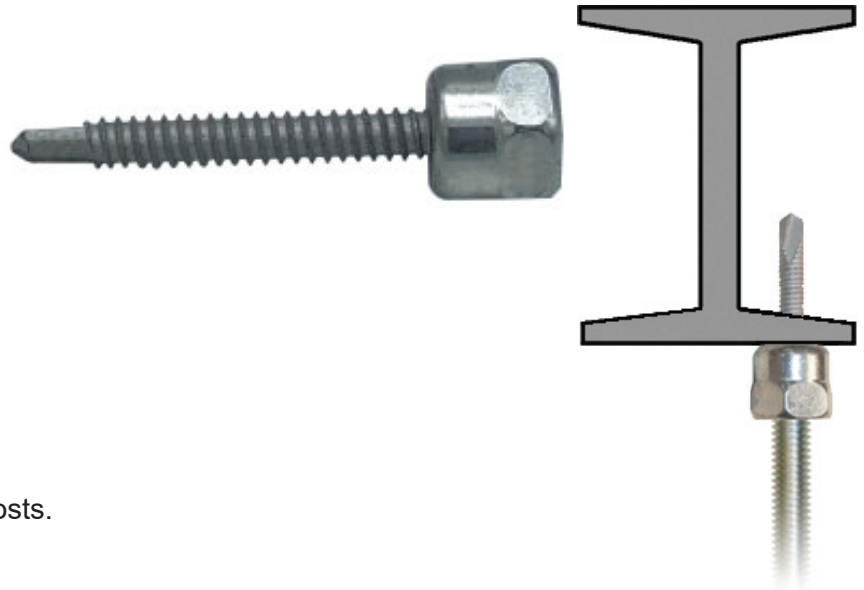

| W-R# | Model | Screw Description | Ultimate Pull Out (lbs.) | Min Steel Thickness | Max Steel Thickness | Weight |
|----------|----------|-------------------------|------------------------------|---------------------|---------------------|-----------|
| 2440006 | DST-10 | 1/4-14 x 1" TEKS 3 | 446 (20 ga.) 970 (16 ga.) | .036" -20 ga. | 3/16" | .046 lbs. |
| *2440020 | DSTR-1 | 1/4-20 x 1" TEKS 3 | 1510 (20 ga.)** | .036" -20 ga. | 3/16" | .054 lbs. |
| *2440022 | DSTR-516 | 5/16-18 x 1-1/4" TEKS 3 | 2200 (20 ga.)** | .036" -20 ga. | 1/8" | .054 lbs. |
| 2440010 | TEK-50 | 12-24 x 1-1/2" TEKS 5 | 3125 (20 ga.)** | .187" -3/16" | 1/2" | .048 lbs. |
| 2440018 | DST-20 | 1/4-14 x 2" TEKS3 | 446 (3/16") 970 (16 ga.) | .036" -20 ga. | 3/16" | .055 lbs. |

* Furnished with Retaining Nut

** UL Test Load 1500 lbs.

FM Test Load 1475 lbs.