

**SAMMYS®**

Ask for SAMMYS in the YELLOW Box!



Job Name: \_\_\_\_\_

Job Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Approval: \_\_\_\_\_

## “Sammys X-Press®” Screws for Steel Deck

### Design Features:

- Steel Construction
- Electro-Zinc Finish
- Domestic


### Operating Specifications:

Rod Size: 3/8" x 16T

### Required Installation Tool:

Sammys X-Press IT® Nut Driver  
W-R # 2440110

**Use:** For use with a 3/8" threaded rod. The *Sammy X-Press* screw expands to provide direct vertical attachment in metal deck (22-16 gauge). The *Sammy X-Press Swivel* allows you to hang plumb in extreme roof pitches: 45° in metal deck for 12/12 pitch. Saves time and installation costs.

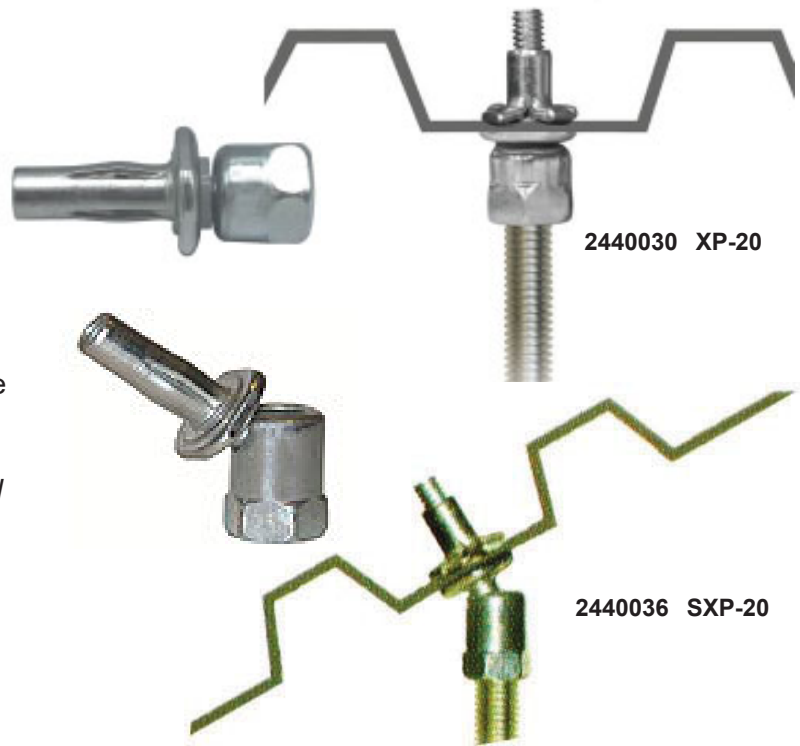

W-R#	Model	Ultimate Pull Out (lbs.)	UL Test Load (lbs.)	FM Test Load (lbs.)	Min Steel Thickness	Max Steel Thickness	Weight
2440030	XP-20	1146 (22 ga.)	850 (2-1/2" Pipe) 185 (Luminaire) 250 (Luminaire) 283 (Conduit & Cable)	940 (4" Pipe) 1475 (4" Pipe)	.027" .027" .056"	.125"	.0775 lbs.
2440036	SXP-20	1061 (22 ga. vert.) 829 (45° off vert.)	750 (2" Pipe) 170 Vertical (Luminaire) 80 @ 45° (Luminaire) 283 Vertical (Conduit & Cable) 233 @ 45° (Conduit & Cable)	635 (2" Pipe)	.027"	.125"	