



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____


Aluminum Roof Flashings

Design Features:

- 25 Mil. Base
- Fits 45° Roof Pitch
- Domestic

Operating Specifications:

- Collar Heat Test: 180° F
- Tested for UV, Ozone, and Weather Resistance

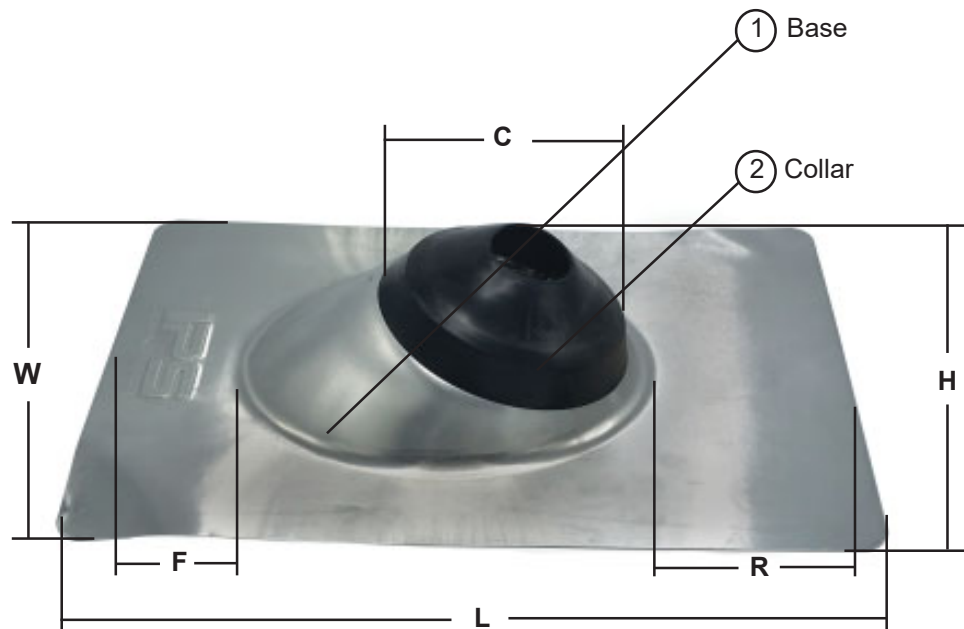

Material Specifications		
No.	Part	Material
1	Base	Aluminum
2	Collar	Elastomer

W-R#	Vent Size	Dimensions						Weight	Min	Box
		L	W	H	F	R	C			
2534202	1-1/2"	12-1/2"	8-3/4"	2-1/4"	2-3/8"	3-1/2"	4-1/4"	.412 lbs.	12	12
2534204	2"	12-1/2"	8-3/4"	2-1/4"	2-3/8"	3-1/2"	4-1/4"	.404 lbs.	12	12
2534206	3"	14-1/2"	10-3/4"	2"	2-3/8"	2-5/8"	5-1/2"	.609 lbs.	12	12
2534208	4"	16"	12"	2-1/8"	2-3/4"	3-3/4"	6-1/2"	.657 lbs.	12	12

DO NOT use Petroleum based mastics, sealing compounds, or paints on collar portion of all flashings, on all hardbase, flexible, or rain collars.