



Job Name: \_\_\_\_\_

Job Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Approval: \_\_\_\_\_

## Ring Gasket- SBR (Red Rubber)

### Design Features:

- 1/8" Thick
- Suitable for 150 lbs. Flange
- Domestic


### Operating Specifications:

- Temperature: -20° to 170° F
- Tensile Strength: 600psi
- Elongation (%): 200%
- Durometer: 70-80

### Material Specifications:

- Polymer: Styrene-Butadiene

ATSM Specification: D 2000 M1AA 705

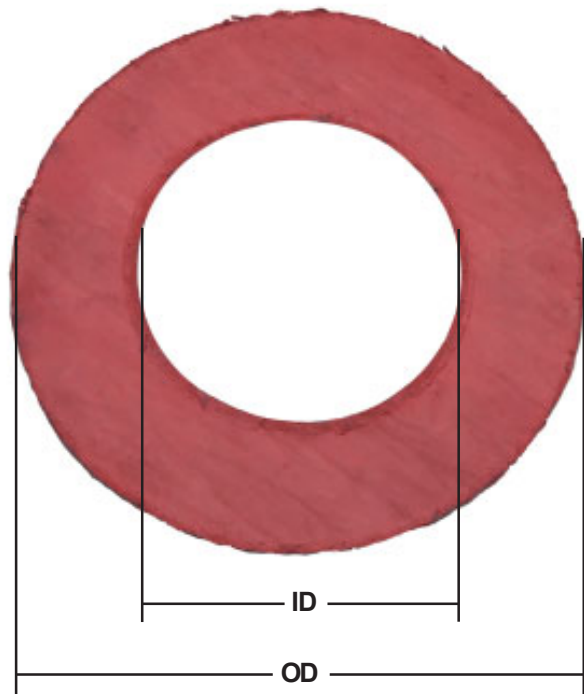

W-R#	Size	ID	OD	Weight
2737102	1-1/2"	1-7/8"	3-1/4"	.050 lbs.
2737104	2"	2-1/4"	4"	.072 lbs.
2737106	2-1/2"	2-3/4"	4-3/4"	.100 lbs.
2737108	3"	3-1/2"	5-3/8"	.110 lbs.
2737110	3-1/2"	3-7/8"	6-1/4"	.155 lbs.
2737112	4"	4-3/8"	6-7/8"	.165 lbs.
2737114	5"	5-1/2"	7-3/4"	.175 lbs.
2737116	6"	6-1/2"	8-7/8"	.195 lbs.