



Job Name: \_\_\_\_\_

Job Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Approval: \_\_\_\_\_

# Con-Stab® Couplings

## Design Features:

- Continental's Patented "ID Seal"
- For Underground PE Pipe (ASTM D 2513) Only
- Made in the USA

## Operating Specifications:

Temperature: -20° to 140° F  
 Pressure: 125 psi

- The gripping action occurs on the outside of the pipe, and prevents slip-page and pipe pullout.
- The **seal** is formed on the **INSIDE** of the pipe -- *where the surface is the smoothest. Therefore you must chamfer the INSIDE of your pipe!!!*




**Always Match Pipe Size & SDR**



You must use a Continental Chamfer Tool on a Continental Fitting

## Continental's "ID Seal"

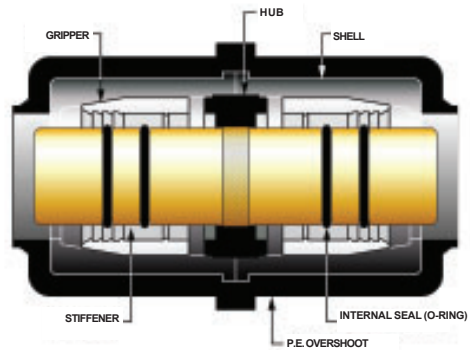

Continental Industries is an ISO 9001 Certified Company.  
 NFPA 58, LP-Gas Code  
 NFPA 54, National Fuel Gas Code  
 IAPMO - Uniform Plumbing Code  
 ICC - International Plumbing Code



Approved by the Commonwealth of Massachusetts  
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)  
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"  
 ASTM D 2513 "Standard Specifications for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"

W-R#	Size	Wall Thickness	Overall Length	Weight	Required Chamfer Tool
2881000	1-1/2" CTS	.090 Wall	4"	0.32 lbs.	2888020
2881002	3/4" IPS	SDR-11	4"	0.60 lbs.	2888014
2881004	1" IPS	SDR-11	4-1/8"	0.80 lbs.	2888016
2881020	1" CTS	.099/.101 Wall	4-1/8"	0.66 lbs.	2888022
2881006	1-1/4" IPS	SDR-10	6"	1.50 lbs.	2888006
2881007	1-1/4" IPS	SDR-11	6"	1.50 lbs.	2888007
2881008	1-1/2" IPS	SDR-11	5-5/8"	1.75 lbs.	2888008
2881010	2" IPS	SDR-11	6"	2.25 lbs.	2888010