



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____


Poly-End Anodeless Gas Meter Risers

Design Features:

- Anodeless Design
- For Underground PE Pipe (ASTM D 2513) Only
- Corrosion Resident Fusion Bonded Epoxy Coating
- Yellow Medium Density Polyethylene - PE2406
- Made in the USA

Operating Specifications:

Temperature: -20° to 140° F
Pressure: 100 psi

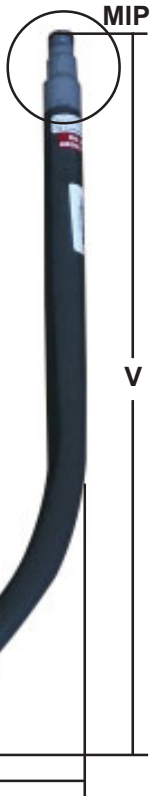

Always Match Pipe Size & SDR



You must use a **Continental Chamfer Tool** on a **Continental Fitting**



NFPA 58, LP-Gas Code
 NFPA 54, National Fuel Gas Code
 IAPMO - Uniform Plumbing Code
 ICC - International Plumbing Code



Approved by the Commonwealth of Massachusetts
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
 ASTM D 2513 "Standard Specifications for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"

W-R#	Size	Wall Thickness	Dimensions			Weight	Required Chamfer Tool
			V	H	PE		
2886002	3/4" IPS	SDR-11	30"	16"	10"	4.50 lbs.	2888014
2886006	1" IPS	SDR-11	30"	16"	10"	5.95 lbs.	2888016
2886030	1" CTS	.099/.101 Wall	30"	16"	10"	8.20 lbs.	2888022
2886010	1-1/4" IPS	SDR-10	36"	22"	10"	8.90 lbs.	2888006
2886011	1-1/4" IPS	SDR-11	36"	22"	10"	8.85 lbs.	2888007
2886014	1-1/2" IPS	SDR-11	36"	26"	10"	14.20 lbs.	2888008
2886018	2" IPS	SDR-11	36"	30"	10"	21.25 lbs.	2888010