



Job Name: _____
 Job Location: _____
 Contractor: _____
 Engineer: _____
 Approval: _____

Con-Stab® Anodeless Gas Meter Risers

Design Features:



- Anodeless Design
- For Underground PE Pipe (ASTM D 2513) Only
- Continental's Patented "ID Seal"
- Yellow Medium Density Polyethylene - PE2406
- Made in the USA

Operating Specifications:

Temperature: -20° to 140° F
 Pressure: 125 psi

You must use a Continental Chamfer Tool on a Continental Fitting

Always Match Pipe Size & SDR

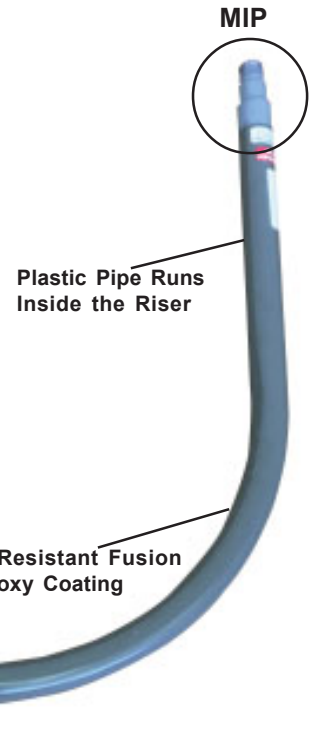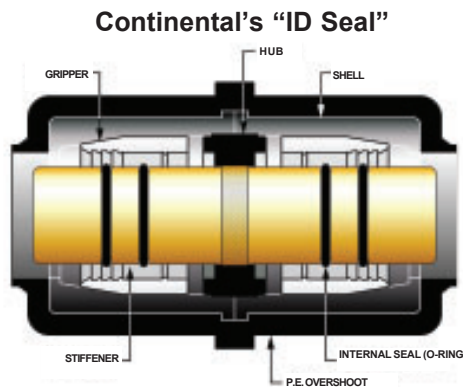

Medium Density Yellow Polyethylene PE2406

NFPA 58, LP-Gas Code
 NFPA 54, National Fuel Gas Code
 IAPMO - Uniform Plumbing Code
 ICC - International Plumbing Code
 Approved by the Commonwealth of Massachusetts
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
 ASTM D 2513 "Standard Specifications for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"

W-R#	Size	Wall Thickness	Vertical Length	Horizontal Length	Weight	Required Chamfer Tool
2886004	3/4" IPS	SDR-11	30"	29"	5 lbs.	2888014
2886036	1/2" CTS	.090 Wall	30"	12"	3 lbs.	2888020
2886008	1" IPS	SDR-11	30"	28"	6 lbs.	2888016
2886040	1" CTS	.099/.101 Wall	30"	27"	3 lbs.	2888022
2886012	1-1/4" IPS	SDR-10	32"	34"	10 lbs.	2888006
2886013	1-1/4" IPS	SDR-11	32"	34"	10 lbs.	2888007
2886016	1-1/2" IPS	SDR-11	32"	34"	16 lbs.	2888008
2886020	2" IPS	SDR-11	36"	34"	22 lbs.	2888010