



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____

3" Poly-End Anodeless Gas Meter Riser

Design Features:

- Anodeless Design
- For Underground PE Pipe (ASTM D 2513) Only
- Corrosion Resistant Fusion Bonded Epoxy Coating
- Yellow Medium Density Polyethylene - PE2406
- Plain PE End for Use with Fusion or Dresser® Style 711 Coupling
- Made in the USA

Operating Specifications:

Temperature: -20° to 140° F

Pressure: 100 psi


You must use a
Continental Chamfer Tool
on a **Continental Fitting**



NFPA 58, LP-Gas Code
NFPA 54, National Fuel Gas Code
IAPMO - Uniform Plumbing Code
ICC - International Plumbing Code



Approved by the Commonwealth of Massachusetts
D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
ASTM D 2513 "Standard Specifications for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"

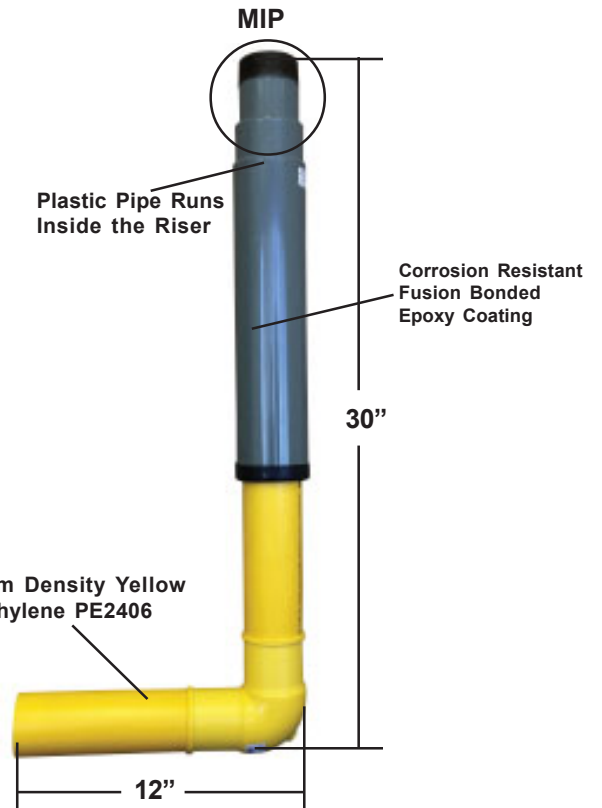

W-R#	Size	Wall Thickness	Vertical Length	Horizontal Length	Weight
------	------	----------------	-----------------	-------------------	--------

2886070	3" IPS	SDR-11.5	30"	12"	20.75 lbs.
---------	--------	----------	-----	-----	------------