



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____


Con-Stab® Reducer Coupling - CTS x IPS

Design Features:

- Continental's Patented "ID Seal"
- For Underground PE Pipe (ASTM D 2513) Only
- Made in the USA

Operating Specifications:

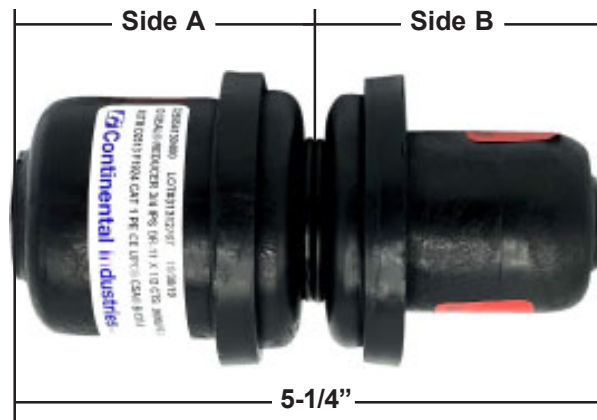

Temperature: -20° to 140° F
Pressure: 125 psi



You must use a **Continental Chamfer Tool** on a **Continental Fitting**

Always Match Pipe Size & SDR



 NFPA 58, LP-Gas Code
 NFPA 54, National Fuel Gas Code
 IAPMO - Uniform Plumbing Code
 ICC - International Plumbing Code
 Approved by the Commonwealth of Massachusetts
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
 ASTM D 2513 "Standard Specifications for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"

W-R#	Side A		Side B		Weight	Required Chamfer Tools
	CTS	Wall	IPS	SDR		
2890040	1/2"	.090	3/4"	11	.637 lbs.	2888020, 2888014
2890042	1/2"	.099/.101	1"	11	.702 lbs.	2888020, 2888016
<hr/>						
2890002	1"	.090	3/4"	11	.803 lbs.	2888022, 2888014
2890004	1"	.099/.101	1"	11	.918 lbs.	2888022, 2888016