



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____

Poly-Tec® Medium Density (PE2406) Polyethylene Ball Valves

Design Features:

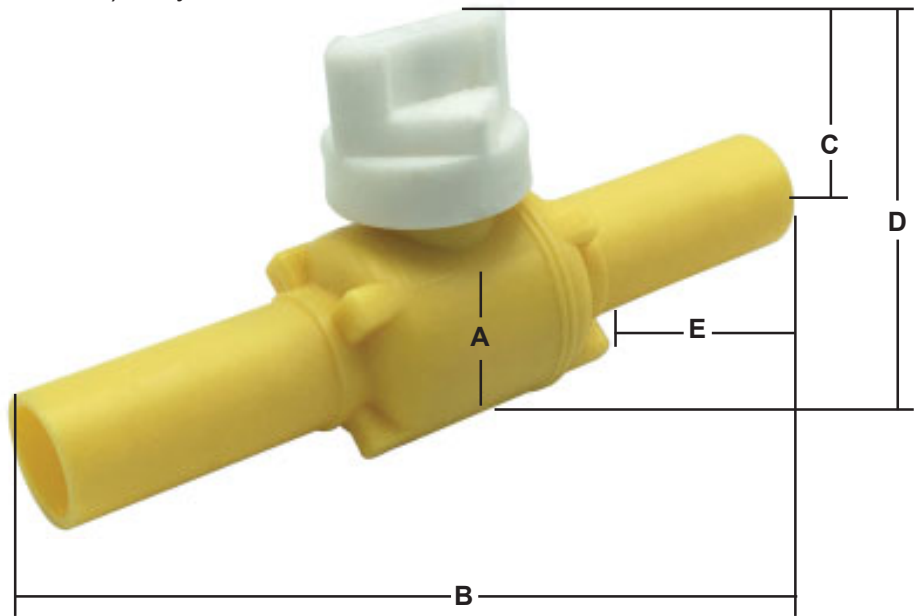
- For Underground PE Pipe (ASTM D 2513) Only
- Made in the USA






Operating Specifications:

Temperature: -20° to 140° F
 Pressure: 100 psi

You must use a
Continental Chamfer Tool
 on a **Continental Fitting**

**Always
 Match
 Pipe Size
 & SDR**



 NFPA 58, LP-Gas Code
 NFPA 54, National Fuel Gas Code
 IAPMO - Uniform Plumbing Code
 ICC - International Plumbing Code
 Approved by the Commonwealth of Massachusetts
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
 ASTM D 2513 "Standard Specifications for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"

W-R#	Size	Wall Thickness	Dimensions					Weight	Required Chamfer Tools
			A	B	C	D	E		
2893102	3/4"	SDR-11	1.06"	11.5"	5.12"	3.7"	3.62"	0.99 lbs.	2888014
2893104	1"	SDR-11	1.06"	11.5"	5.12"	3.7"	3.62"	1.01 lbs.	2888016
2893106	1-1/4"	SDR-11	1.06"	11.5"	5.12"	3.7"	3.62"	1.01 lbs.	2888007
2893108	1-1/2"	SDR-11	1.26"	11.81"	5.51"	3.78"	2.80"	1.76 lbs.	2888018
2893110	2"	SDR-11	1.38"	11.81"	5.51"	3.78"	3.31"	1.90 lbs.	2888010