



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____

Water Hammer Arrester Tees


Design Features:

- Lead Free* Brass Construction
- Furnished with Brass & Poly Compression Ferrule
- Imported

Operating Specifications:

Pressure: 200 psi

Use: Designed to protect water lines during pressure surges caused by quick valve closure. The excessive pressure surge is absorbed by the pre-charged cushion of air permanently sealed within the water hammer arrester.

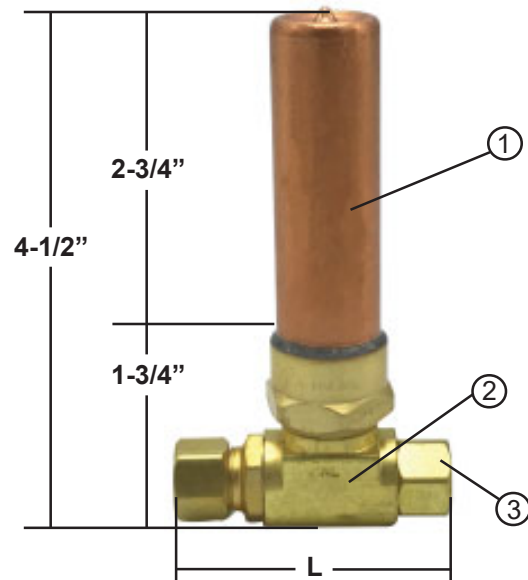

Material Specifications	
Part	Material
1 Body	Copper
2 Tee	Brass
3 Compression Nut	Brass
Piston	Acetal
Seals	EPDM
Solder	Lead Free
Compression Ferrule	Polyethelene
Compression Ferrule	Brass



Meets AB1953/NSF61G Standard

W-R#	Description	L	Weight	Min	Box
4320010	1/4" OD x 1/4" OD	2-7/8"	.447 lbs.	1	10
4320012	3/8" OD x 3/8" OD	2-1/2"	.419 lbs.	1	10
4320014	5/8" OD x 5/8" OD	2-3/4"	.501 lbs.	1	10
4320016	1/2" PEX x 1/2" PEX	2-7/8"	.422 lbs.	1	10

*The wetted surface of this product contacted by consumable water contains less than one quarter of a percent (.25%) of lead by weight.