



Job Name: _____
 Job Location: _____
 Contractor: _____
 Engineer: _____
 Approval: _____

3/4" Hose Vacuum Breakers

Design Features:


- Lead Free* Brass Construction
- With Break-Off Set Screw
- FH x MH Connection

Operating Specifications:

Temperature: 180° F

Pressure: 125 psi

Use: Prevents backflow into potable water supply. Use any place where hoses are attached to threaded valves, for indoor or outdoor use.

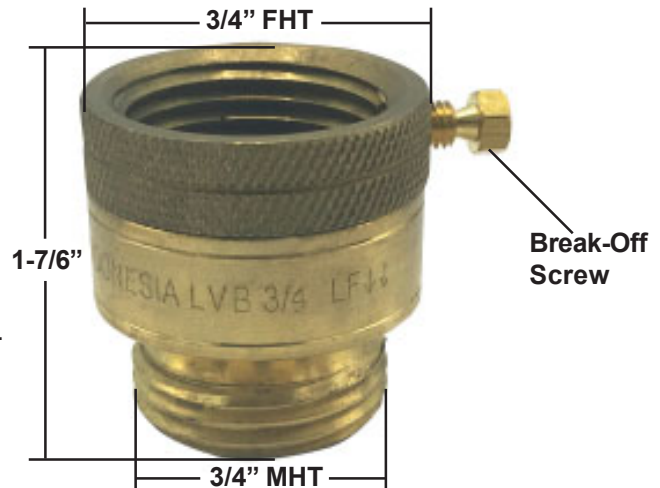

Installation Instructions: Screw on to hose thread of sillcock.
 For permanent installation: tighten break-off screw until head snaps off

| Material Specifications | |
|-------------------------|-----------|
| Part | Material |
| Body | See Below |
| Washer | Rubber |
| Plunger | Acetal |
| Break-off screw | Brass |



Meets AB1953/NSF61G Standard

| W-R# | Description | Body Material Specifications | Weight | Min | Box |
|---------|--------------|------------------------------|-----------|--------|-----|
| 4418000 | 3/4" Brass | Lead Free* Brass | .155 lbs. | 1 | 12 |
| 0418500 | 3/4" Plastic | Nylon Reinforced Zytel® | | 10/Bag | |

*The wetted surface of this product contacted by consumable water contains less than one quarter of a percent (.25%) of lead by weight.