



Job Name: \_\_\_\_\_  
 Job Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Approval: \_\_\_\_\_


## Con-Stab® Saddle Tees

### Design Features:


- Continental's patented "ID Seal"
- For underground PE pipe (ASTM D 2513) only
- 316 Stainless Steel Bolts, Washers & Inserts
- "Coupon-Retaining" Punch
- Made in USA

### Operating Specifications:

Temperature: -20° to 140° F  
 Pressure: 125 psi

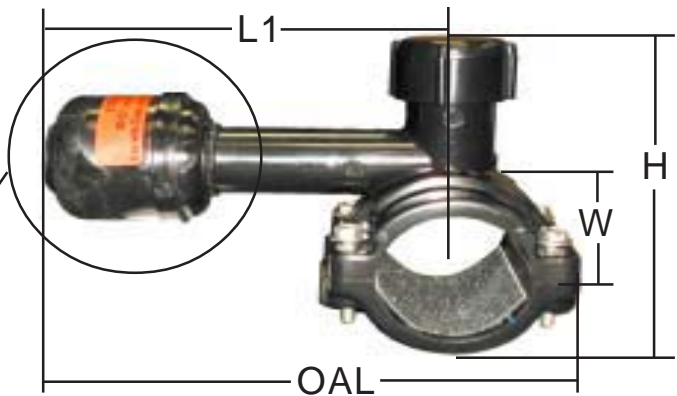

Continental's "ID Seal"

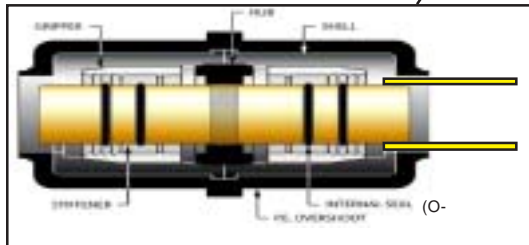


Always Match Pipe Size & SDR

You must use a Continental Chamfer Tool on a Continental Fitting



Continental Industries is an ISO 9001 Certified Company.  
 NFPA 58, LP-Gas Code                      NFPA 54, National Fuel Gas Code  
 ICC – International Plumbing Code      IAPMO – Uniform Plumbing Code  
 Approved by the Commonwealth of Massachusetts  
 D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)  
 ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"  
 ASTM D 2513 "Standard Specification for Thermoplastic Gas Pressure Pipe, Tubing and Fittings"

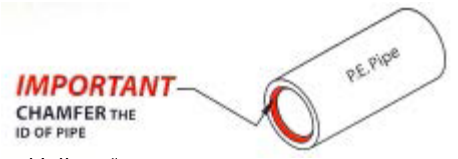

WR#	Main	Outlet	SDR	H	L1	OAL	W	Weight	Required Chamfer Tool
2893090	1-1/4"	3/4"	SDR-11	4-13/16"	6-1/2"	8-1/16"	4"	1.20 lbs.	2888014
2893092	1-1/4"	1"	SDR-11	4-13/16"	6-1/2"	8-1/16"	4"	1.29 lbs.	2888016
2896002	1-1/2"	3/4"	SDR-11	5-7/8"	6-3/8"	8-1/2"	4"	1.67 lbs.	2888014
2896006	1-1/2"	1"	SDR-11	5-7/8"	6-3/8"	8-1/2"	4"	1.75 lbs.	2888016
2894002	2"	3/4"	SDR-11	5-5/8"	6-3/16"	8-1/4"	4"	1.44 lbs.	2888014
2894004	2"	1"	SDR-11	5-5/8"	6-3/16"	8-1/4"	4"	1.53 lbs.	2888016
2894006	2"	1-1/4"	SDR-11	8-1/2"	9-5/8"	11-7/8"	6"	1.53 lbs.	2888007
2894502	3"	3/4"	SDR-11	7-3/16"	6-11/16"	9-1/4"	3-7/16"	1.52 lbs.	2888014
2894504	3"	1"	SDR-11	7-3/16"	6-11/16"	9-1/4"	3-7/16"	1.61 lbs.	2888016
2894506	3"	1-1/4"	SDR-11	9-5/8"	9-9/16"	12-7/16"	5-3/4"	1.20 lbs.	2888007
2894508	3"	2"	SDR-11	9-5/8"	9-9/16"	12-7/16"	5-3/4"	1.29 lbs.	2888010