



Job Name: \_\_\_\_\_

Job Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Approval: \_\_\_\_\_

# Companion Flange Gasket- SBR (Red Rubber)

**Design Features:**

- 1/8" Thick
- Suitable for 150 lbs. Flange
- Domestic


**Operating Specifications:**

- **Tempature:** -20° to 170° F
- **Tensile Strenght:** 600 psi
- **Elongation (%):** 200%
- **Durometer:** 70-80

**Material Specifications:**

- **Polymer:** Styrene-Butadiene

ATSM Specification: D 2000 M1AA 705

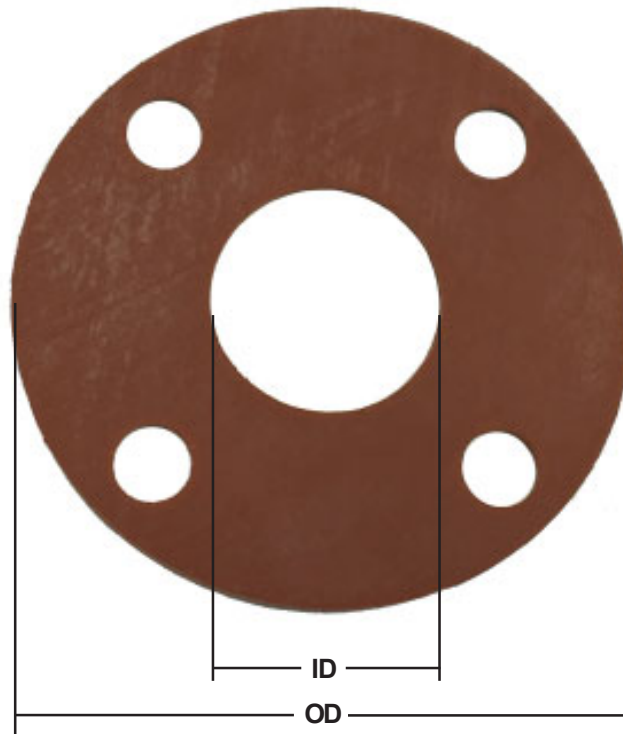

W-R#	Size	ID	OD	# of Holes	Hole Size	Weight
2739100	1-1/2"	1-3/4"	4-7/8"	4	3/4"	.120 lbs.
2739102	2"	2-1/4"	6"	4	3/4"	.175 lbs.
2739104	2-1/2"	2-3/4"	7"	4	3/4"	.225 lbs.
2739106	3"	3-3/8"	7-1/2"	4	3/4"	.245 lbs.
2739108	3-1/2"	3-7/8"	8-1/2"	8	3/4"	.330 lbs.
2739110	4"	4-3/8"	9"	8	3/4"	.345 lbs.
2739112	5"	5-1/2"	9-7/8"	8	3/4"	.365 lbs.
2739114	6"	6-1/2"	11"	8	3/4"	.430 lbs.